
## MARION COUNTY SURVEYOR'S OFFICE

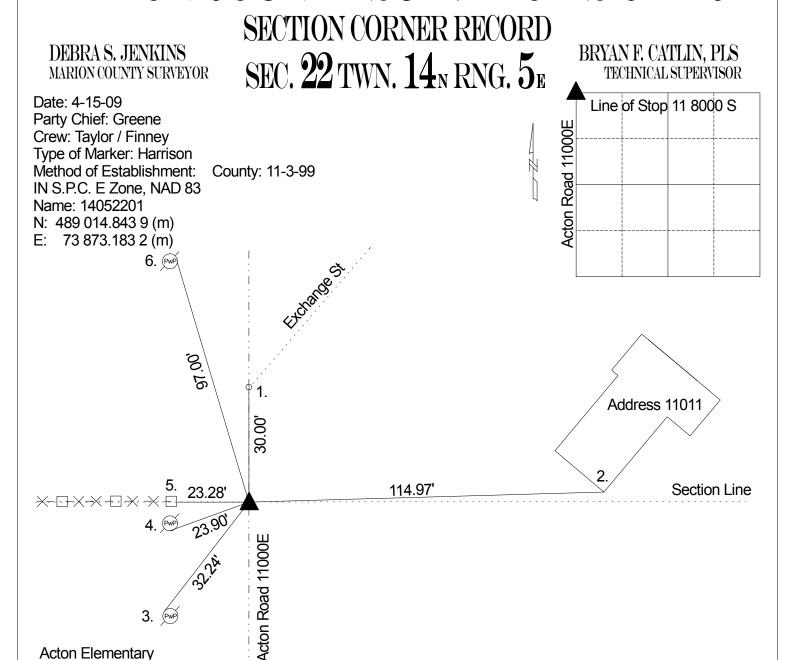

Original post set 1820 by Hendricks with witness: 36" beech S 25 W 31 links, 6" dogwood N 40 W 29 links per Marion County Atlas pg 13. Survey by Hosbrook 12-18-1850 indicates no stone with witness: 24" beech N 71 1/2 W 50 links, and 20" beech N 36 3/4 E 48 links per Franklin Twp. Legal Survey Book, pg 45. Survey by Hosbrook, 12-12-1853 indicates no stone with with witness: 24" beech N 71 1/2 W 50 links, and 20" beech N 46 3/4 E 48 links per Franklin Twp. Legal Survey Book, pg 44. Monroe 11-12-59 called a sq. brass plug with cut 'x'. McLand 5-10-72 called a punched sq. plate 2" dn. Fortner 12-17-74 called PK nail over sq. steel plate 2" dn.Miller 8-26-77 called brass plug. Wilcoxen 11-16-84 called 2" sq plate with cut 'x'. Marendt 7-18-85 called same. Greene 3-1-90 called same. Wilcoxen 1-17-95 called PK nail. Wilcoxen 2-10-99 called same. Excavated 10-25-99 and a 1 1/4" sq brass plug fd 7" dn. Harrison set. Re-tied 9-25-04 by Wilcoxen. Re-tied 4-15-09 by Greene.

REF.	DISTANCE	DESCRIPTION
1.	30.00'	Due N approximate C/L of Exchange St
2.	114.97'	Southerly corner of stone address 11011
3.	32.24'	Mag nail w/brass washer NW cut-off PwP #53-801 D 6" up
4.	23.90'	Mag nail w/ brass washer S PwP # 53-801 d 2" up
5.	23.28'	Center of steel corner fence post
6.	97.00'	Mag nail w/brass washer E PwP no # 18" up